



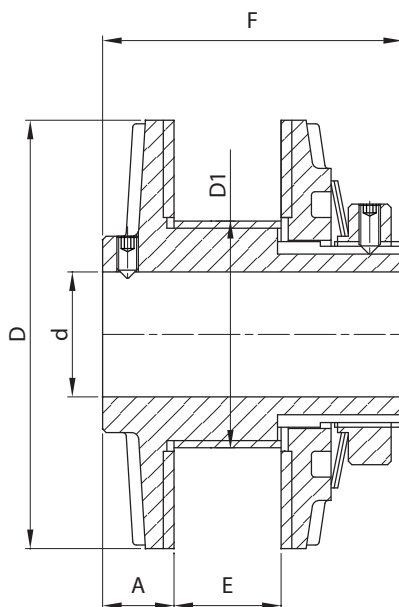


LIMITADOR DE TORQUE **POR** **Acoplamento de segurança a fricção**
LIMITADOR DE TORQUE **ESP** **Acoplamiento de seguridad a fricción**
TORQUE LIMITER **ENG** **Safety friction couplings**

TALC


Tipo/Type P



C

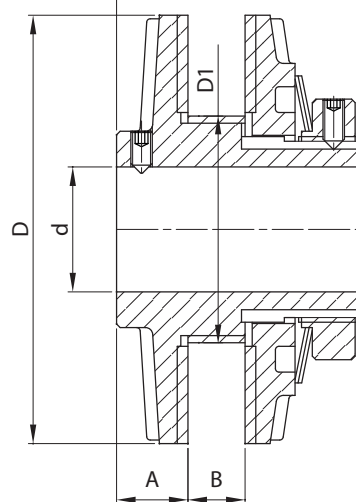

Tipo/Type R

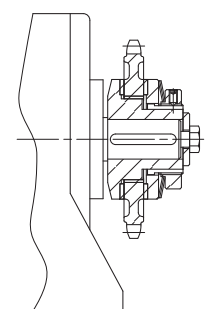

Chavetero según DIN 6885/1

Tamaño/ Tamaño/size	Torque (Nm)	Nº resortes/ molas/ springs	D	D1	d		C	F	A	B		E	
					min	max				min	max	min	max
0,5/1	5.0	1	50	32	10	17	40	50	11.0	6	10	16	20
0,5/2	7.5	2											
1/1	10.0	1	60	38	12	20	46	58	12.0	7	12	19	24
1/2	15.0	2											
2/1	20.0	1	72	45	12	24	52	64	12.5	9	14	21	26
2/2	30.0	2											
4/1	40.0	1	86	52	15	28	60	74	13.0	10	16	24	30
4/2	60.0	2											
8/2	80.0	2	104	60	18	35	72	86	18.0	11	18	25	32
8/3	120.0	3											
16/2	160.0	2	126	70	20	38	82	96	23.0	12	20	26	43
16/3	250.0	3											
32/2	320.0	2	152	82	22	45	90	108	25.0	13	22	31	40
32/3	500.0	3											
63/2	630.0	2	185	95	25	50	102	124	28.5	16	26	38	48
63/3	1000.0	3											
125/2	1250.0	2	224	110	30	60	120	150	33.5	19	30	49	60
125/3	2000.0	3											
250/2	2500.0	2	270	128	40	80	132	168	34.5	22	34	58	70
250/3	4000.0	3											
500/2	5000.0	2	342	165	50	100	168	208	43.5	26	40	66	80
500/3	8000.0	3											
1000/2	10000.0	2	432	212	60	130	210	260	54.0	35	50	85	100
1000/3	16000.0	3											
2000/2	20000.0	2	546	272	75	170	260	325	68.0	45	65	110	130
2000/3	32000.0	3											
4000/2	40000.0	2	690	350	100	220	325	400	85.0	62	82	135	155
4000/3	64000.0	3											